
MD-327RF Specification

I.Product Pictures



MD-327RF

II.Product Brief

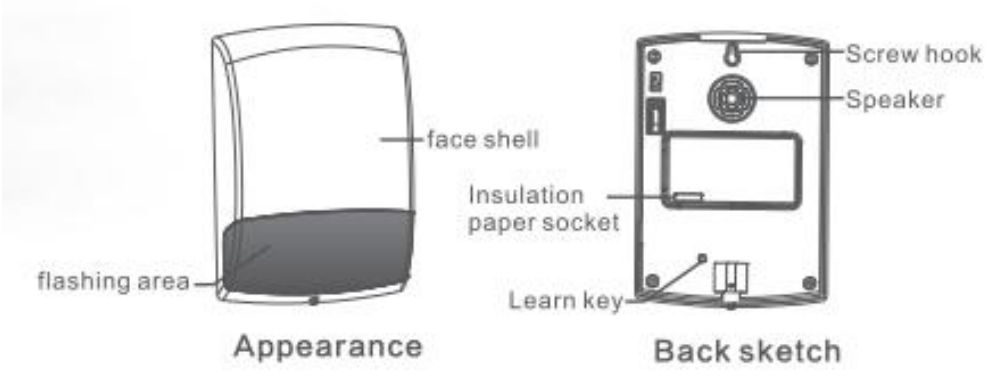

III.Specification

Product No.	**MD-327RF**
Working voltage	DC 3V
Battery	4*LR20 batteries
Static current consumption	average <1.5mA
Alarm current:	≤150mA
Battery low voltage	<2.4V
Modulation method:	FSK
Working frequency:	433/868MHz(optional
Arm and disarm prompt	
Armed	the light flashes and the buzzer sounds 2 times each, and the light flashes once every 40S
Disarm:	the light flashes and the buzzer sounds once each
Alarm indication	
Emergency alarm:	LED light flashes, buzzer sounds, duration is set by the host
Anti-dismantling alarm:	LED light flashes, buzzer sounds for 1 minute
Alarm loudness:	about 110dB
To cancel the alarm:	long press the code key for 3S
Wireless distance:	≤200m(open area)
Size:	(L*W*H)288*201*14mm
Applicable places:	Outdoor
Working temperature:	-10℃-+60℃