SL-126-A24Q
STROBE LIGHTS




- For "informative" general signaling requirement applications.
- Powerful xenon tube makes flash visible from a distance.
- Improper polarity connection will not damage circuitry.
- Heavy-duty 18-gauge leads.
- Lens is made of high-impact and heat-resistant acryrex. Available in clear, amber, red, or blue (Also available separately.)
- Operating lifetime of over 300 hours.
- Case is made of high-impact resistant abs plastic, with an approx. diameter of 4" (10cm).
- Temperature range from 22°F (-30°C) to 140°F (60°C)
- Four strobe lights available:

  SL-126-A24Q/A — Amber lens
  SL-126-A24Q/B — Blue lens
  SL-126-A24Q/C — Clear lens
  SL-126-A24Q/R — Red lens
  SL-126-A24Q/G — Green lens


Note: Products with model number that ends with "Q" or have a green "Q" sticker represents RoHS compliant products.

SPECIFICATIONS

Circuits
All solid-state
Input Connections
Red: Positive Black: Negative
Leads
18-gauge UL Listed, 12" long
Electrical Protection
Reverse polarity protected
Illumination
100,000 candle power
Input Voltage
6 to 24VDC
Input Current
30mA ± 20% at 6VDC
120mA ± 20% at 12VDC
150mA ± 20% at 24VDC
Flash Rate
Over 30/minute at 6VDC
Over 70/minute at 12VDC
Over 100/minute at 24VDC
Operating Life
Over 2,000,000 flashes
Operating Life (Hours)
1000 at 6VDC, 450 at 12VDC, 300 at 24VDC
Environment
-22°F (-30°C) to 140°F (60°C)
Base
High-impact black ABS
Lens
High-impact and heat resistant acryrex. Available in clear, amber, red, and blue.

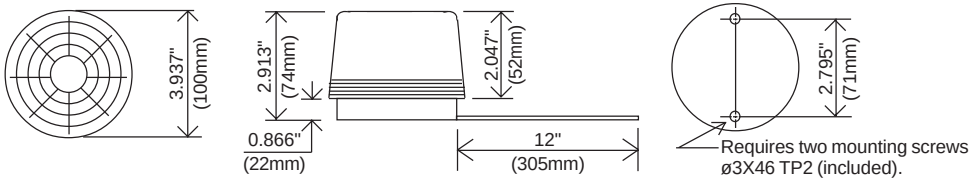

Mounting Template

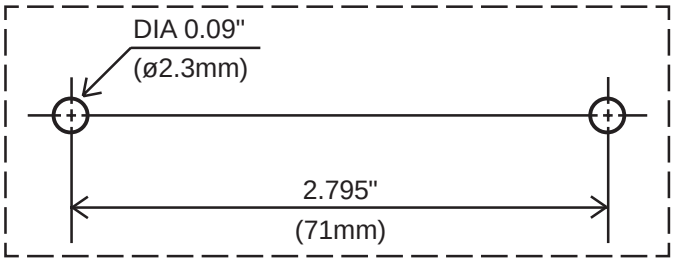

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for a period of one (1) year from the date of sale to the original consumer customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM.
This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair, or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship.
The sole obligation of SECO-LARM, and the purchaser's exclusive remedy, shall be limited to replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damages of any kind to the purchaser or anyone else.

NOTICE: The information and specifications printed in this manual are current at the time of publication. However, the SECO-LARM policy is one of continual development and improvement. For this reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints or typographical errors.
Copyright © 2010 SECO-LARM U.S.A., Inc. All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of SECO-LARM.

SECO-LARM® U.S.A., Inc.
16842 Millikan Avenue, Irvine, CA 92606
Tel: 800-662-0800 / 949-261-2999 Fax: 949-261-7326
Website: www.seco-larm.com
E-mail: sales@seco-larm.com

filename: MuSL126_A24Q_1004.pmd
Order Part: 762-008-4%
PITSW1

SL-126-A24Q
STROBE LIGHTS




- For "informative" general signaling requirement applications.
- Powerful xenon tube makes flash visible from a distance.
- Improper polarity connection will not damage circuitry.
- Heavy-duty 18-gauge leads.
- Lens is made of high-impact and heat-resistant acryrex. Available in clear, amber, red, or blue (Also available separately.)
- Operating lifetime of over 300 hours.
- Case is made of high-impact resistant abs plastic, with an approx. diameter of 4" (10cm).
- Temperature range from 22°F (-30°C) to 140°F (60°C)
- Four strobe lights available:

  SL-126-A24Q/A — Amber lens
  SL-126-A24Q/B — Blue lens
  SL-126-A24Q/C — Clear lens
  SL-126-A24Q/R — Red lens
  SL-126-A24Q/G — Green lens


Note: Products with model number that ends with "Q" or have a green "Q" sticker represents RoHS compliant products.

SPECIFICATIONS

Circuits
All solid-state
Input Connections
Red: Positive Black: Negative
Leads
18-gauge UL Listed, 12" long
Electrical Protection
Reverse polarity protected
Illumination
100,000 candle power
Input Voltage
6 to 24VDC
Input Current
30mA ± 20% at 6VDC
120mA ± 20% at 12VDC
150mA ± 20% at 24VDC
Flash Rate
Over 30/minute at 6VDC
Over 70/minute at 12VDC
Over 100/minute at 24VDC
Operating Life
Over 2,000,000 flashes
Operating Life (Hours)
1000 at 6VDC, 450 at 12VDC, 300 at 24VDC
Environment
-22°F (-30°C) to 140°F (60°C)
Base
High-impact black ABS
Lens
High-impact and heat resistant acryrex. Available in clear, amber, red, and blue.

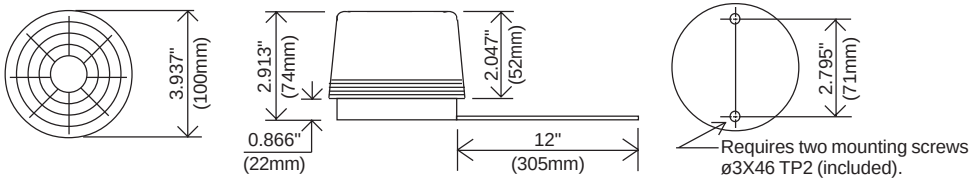

Mounting Template

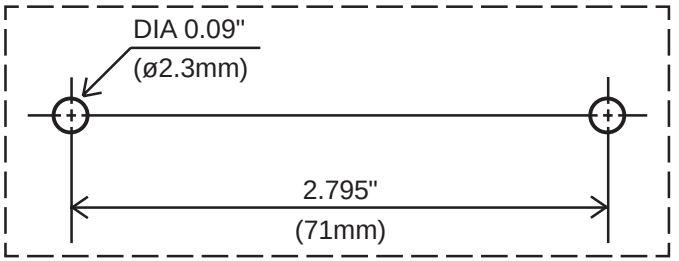

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for a period of one (1) year from the date of sale to the original consumer customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM.
This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair, or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship.
The sole obligation of SECO-LARM, and the purchaser's exclusive remedy, shall be limited to replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damages of any kind to the purchaser or anyone else.

NOTICE: The information and specifications printed in this manual are current at the time of publication. However, the SECO-LARM policy is one of continual development and improvement. For this reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints or typographical errors.
Copyright © 2010 SECO-LARM U.S.A., Inc. All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of SECO-LARM.

SECO-LARM® U.S.A., Inc.
16842 Millikan Avenue, Irvine, CA 92606
Tel: 800-662-0800 / 949-261-2999 Fax: 949-261-7326
Website: www.seco-larm.com
E-mail: sales@seco-larm.com

filename: MuSL126_A24Q_1004.pmd
Order Part: 762-008-4%
PITSW1